



Automatic Pouch Spout Inserter



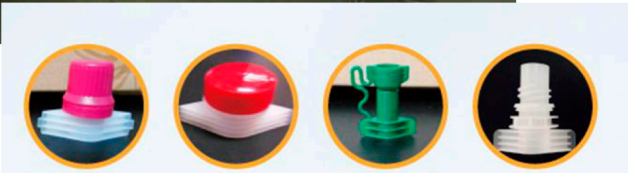

## Specification

- ◆ Pouch size (L×W) : L×W (120-320) × (100-250) mm  
MAX: 300×250mm    320×200mm    260×260mm
- ◆ Cutting angle : 17° ---45° ±2°
- ◆ Spout type : Short spout, supplied by the customer. ( φ 5mm- φ 25mm)
- ◆ Production efficiency : 35-40 pieces/min (the smaller size pouch)  
: 30-35 pieces/min (the bigger size pouch)
- ◆ Power : AC 380V, 50HZ, 5.5KW, 3P
- ◆ Compressed air : 0.7Mpa, 250NL/min
- ◆ Dimension (L×W×H) : 4210×1900×1910mm
- ◆ Cooling water : 6L/min
- ◆ Weight : 1800Kg

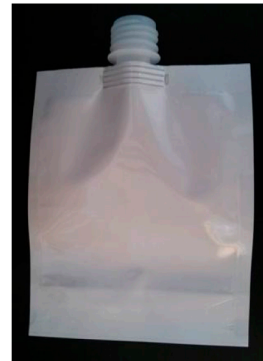


This machine advantage is for corner spout, if accepting spout sealing position left-right +1.5mm error, also can do center spout.

Center spout pouch size: L×W (120-250) × (90-130) mm    MAX:250×130mm

### \*Spout feeding:




### \*Pouch feeding:

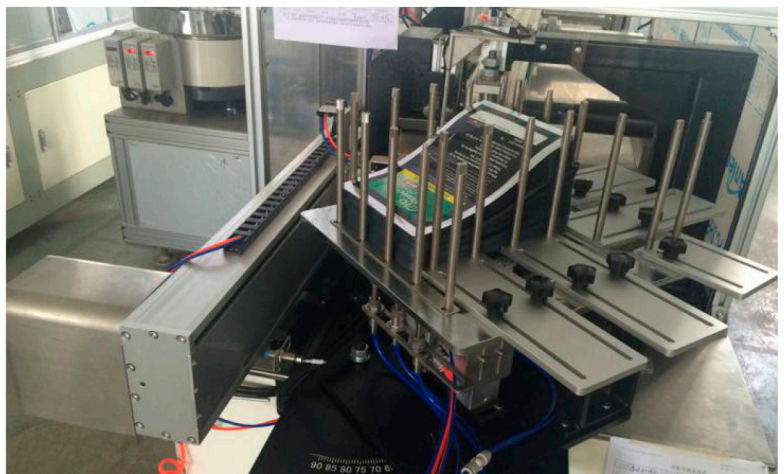

### \*Angle cutting:



### \* Spout inserting

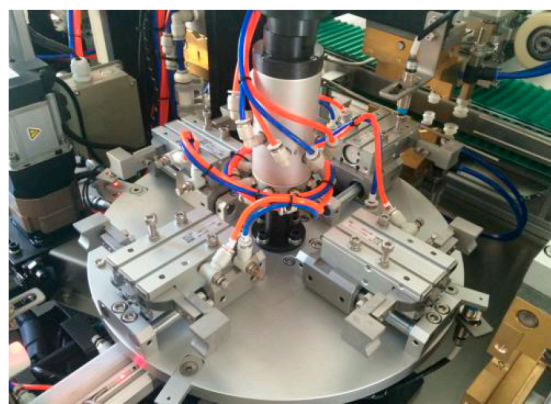




\* Pouch moving and sealing:



\*Pouch unloading:

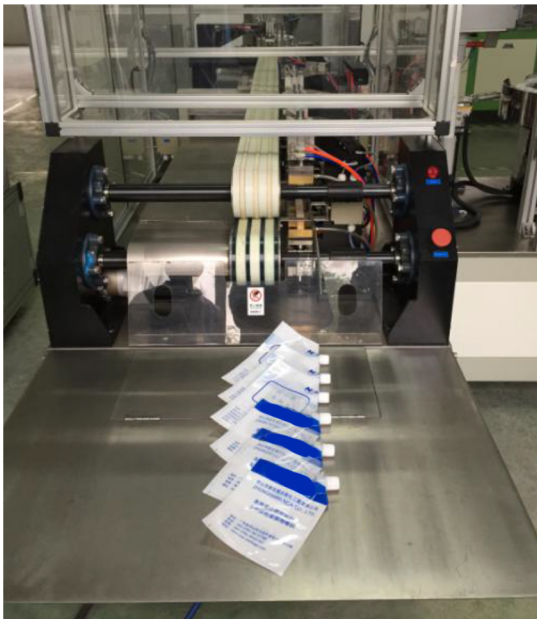

\*Finished pouch packing

